



SLFA-60



SLFA-6000
Series

Sulfur-in-Oil

SLFA-60/6000 Series

X-ray Fluorescence Sulfur-in-Oil Analyzer

SLFA-60/6000 series for a new generation of petroleum products

Compact & Robust Design

Simple Operation

Safety Features

Wide Sample Range


HORIBA introduces the new standard of sulfur-in-oil analyzers, the SLFA-60 and 6000 series. These instruments feature new software and hardware to meet the growing challenges in the petroleum industry.

Compact & Robust Design

Secondary Window to Prevent Leakage

Both the SLFA-60 and 6000 series have a protective membrane covering the cell window to prevent the detector and X-ray tube from accidental sample leakage. This protective membrane unit is simple to assemble and replace.

Cross section of sample cell and detector

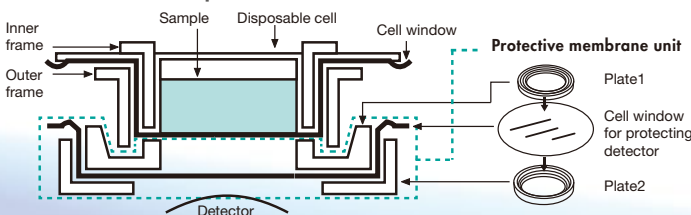


Large Screen Display

The easy viewing monitor screen will display real-time data in ppm or %.

Turntable (SLFA-6800 only)

The turntable equipped with the SLFA-6800 has been newly devised. Newly designed stepper motor is more robust and faster between sampling.

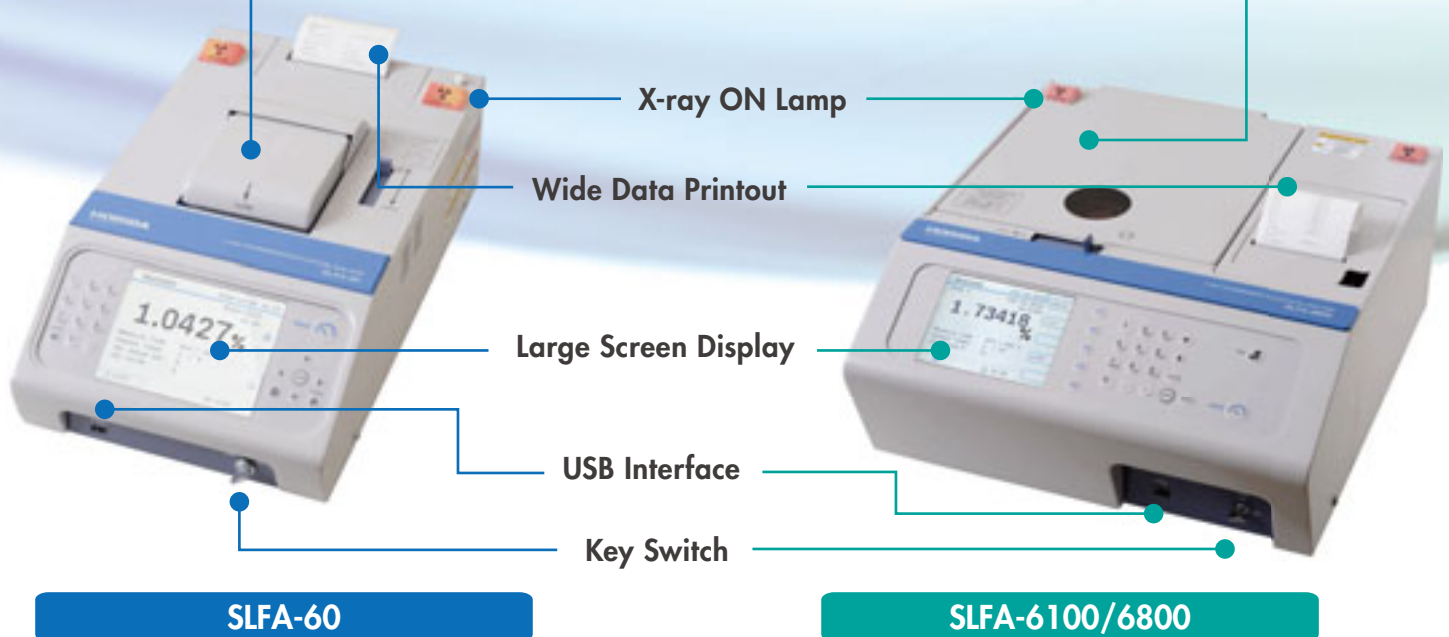

SLFA-60

SLFA-6100/6800

Simple Operation

Measurement Procedure

1. Pour the sample into the sample cell
2. Place the sample cell on the sample holder
3. Set to the measurement condition
4. Press the "MEAS" button to start the measurement
5. Instrument displays the results and data output

Calibration

New software allows the SLFA-60 to store 3 sets of calibration and the SLFA-6000 series 5 sets. It also allows the users to choose between linear or quadratic curves. Calibration curves are restored manually without having to recalibrate as long as the users save the coefficients value/calibration data.

Safety Features

In addition to our thorough X-ray leakage tests at the factory, the SLFA series are equipped with these safety functions:

Key Switch

Only when the key switch is in the "ON" position, X-rays are turned on.



Shield Shutter

Even if the lid is open, X-rays are continuously on. However, the shield shutter covers the X-ray and will prevent leakage that might be emitted.



The shield shutter


Output Options

Print out, USB memory stick and USB cables connected to PC are available as output options.

* Printer can be switched off if not used.

i) Wide Data Printouts

The users can control the contents/volume of the information on the printouts. There are 3 layout options. Printouts show sample ID, X-ray spectrum, date/time, measurement average value, standard deviation and calibration curve graph etc., on 80 mm wide format for easy viewing.

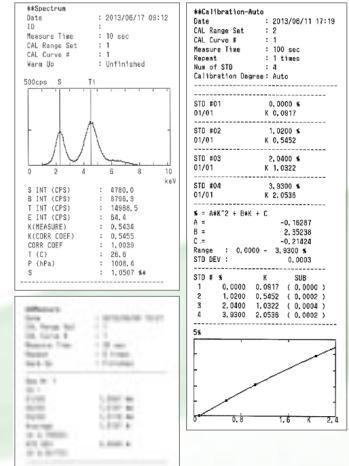

ii) USB Output

The user can transfer data into USB memory or PC connected with USB cable.




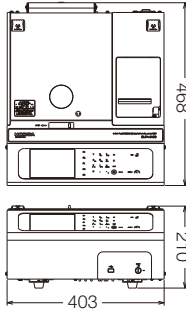
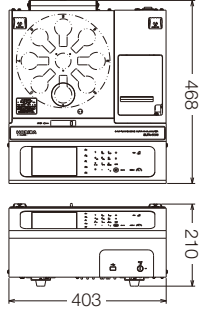
Wide Sample Range

Expanded Measurement Range (0 - 9.9999 wt%)

The SLFA-60 has expanded its range compared to the conventional model, and now both the SLFA-60 and 6000 series can measure from 0 - 9.9999%.



Technical Specifications

| | SLFA-60 | SLFA-6100 | SLFA-6800 |
|---------------------------------|---|---|--|
| Measurement principle | X-ray Fluorescence Analysis Method | | |
| Measurement samples | Sulfur in petroleum products such as heavy oil, naphtha, crude oil and light oil | | |
| Measurement range | 0 - 9.9999% | | |
| Repeatability | 15 ppm or less with a 1% sulfur sample | 5 ppm or less with a 1% sulfur sample, 1.6 ppm or less with a 0% sulfur sample | |
| C/H error correction | +/- 50 ppm or less per C/H *with a 1% sulfur sample | | |
| Lower detection limit | 20 ppm or less * | 5 ppm or less * | |
| Number of calibration curves | Up to 15 calibration curves | | |
| Calibration curve order | Linear or Quadratic (both automatic selection and manual settings are available) | | |
| Amount and number of samples | 4 - 10 mL, 1 sample | | 4 - 10 mL, 8 samples |
| Measurement time | 10 - 600 sec | | |
| Data output | Printout, USB memory stick, USB cable connected to PC | | |
| Spectrum measurement | Energy Range: 0 - 10 keV, spectrum analysis to verify instrument performances | | |
| Operating temperature | + 5 °C to + 40 °C (+ 41 °F to 104 °F) | | |
| Operating humidity | 80% max relative humidity in temperature range + 5 °C to + 30 °C (+ 41 °F to 86 °F) Linear decrease to 50% relative humidity in temperature range + 31 °C to + 40 °C (+ 88 °F to 104 °F) | | |
| Power supply | AC 100 - 240 V +/- 10%, 50/60 Hz | | |
| Power consumption | 80 VA | 150 VA | |
| Conformity standard | ASTM D4294 (USA), ISO 8754, JIS K2541/B7995 | | |
| Weight | Approx. 9 kg | Approx. 21 kg | Approx. 23 kg |
| Dimensional Outlines (Unit: mm) |  |  |  |

* 3 times the standard deviation with a 0% sample



The HORIBA Group adopts IMS (Integrated Management System) which integrates Quality Management System ISO9001, Environmental Management System ISO14001, and Occupational Health and Safety Management System OHSAS18001. We have now integrated Business Continuity Management System ISO22301 in order to provide our products and services in a stable manner, even in emergencies.



Please read the operation manual before using this product to assure safe and proper handling of the product.

- The specifications, appearance or other aspects of products in this catalog are subject to change without notice.
- Please contact us with enquiries concerning further details on the products in this catalog.
- The color of the actual products may differ from the color pictured in this catalog due to printing limitations.
- It is strictly forbidden to copy the content of this catalog in part or in full.
- The screen displays shown on products in this catalog have been inserted into the photographs through compositing.
- All brand names, product names and service names in this catalog are trademarks or registered trademarks of their respective companies.

<http://www.horiba.com> e-mail: info@horiba.co.jp

HORIBA, Ltd. Japan

Head Office
2 Miyahogashi, Kisshoin, Minami-ku, Kyoto, Japan
Phone: 81 (75) 313-8123 Fax: 81 (75) 321-5725

HORIBA (China) Trading Co., Ltd. China

Head Office
Unit D, 1F, Building A, Synnex International Park, 1068 West Tianshan Road, Shanghai, 200335, China
Phone: 86 (21) 6289-6060 Fax: 86 (21) 6289-5553

Beijing Branch
12F, Metropolis Tower, No.2, Haidian Dong 3 Street, Beijing, 100080, China
Phone: 86 (10) 8567-9966 Fax: 86 (10) 8567-9066

Guangzhou Branch
Room 1611 / 1612, Goldlion Digital Network Center, 138 Tiyyu Road East, Guangzhou, 510620, China
Phone: 86 (20) 3878-1883 Fax: 86 (20) 3878-1810

HORIBA Instruments (Singapore) Pte Ltd. Singapore

3 Changi Business Park Vista #01-01 Akzonobel House, Singapore 486051
Phone: 65 (6) 745-8300 Fax: 65 (6) 745-8155

HORIBA Vietnam Co., Ltd. Vietnam

Unit 10, 4 Floor, CMC tower, Duy Tan Street, Dich Vong Hau Ward, Cau Giay District, Hanoi, Vietnam
Phone: 84 (4) 3795-8552 Fax: 84 (4) 3795-8553

HORIBA Korea Ltd. Korea

Seoul Branch
10, Dogok-Ro, 6-Gil, Gangnam-Gu, Seoul-Si, 06259, Korea
Phone: 82 (2) 753-7911 Fax: 82 (2) 756-4972

HORIBA India Private Limited India

Head Office
246, Okhla Industrial Estate, Phase 3 New Delhi-110020, India
Phone: 91 (11) 4646-5001 Fax: 91 (11) 4646-5010

Bangalore Office
No.55,12th Main, Behind BDA Complex, 6th sector, HSR Layout, Bangalore South, Bangalore - 560102, INDIA
Phone: 91 (80) 4127-3637

HORIBA (Thailand) Ltd. Thailand

Head Office
393, 395, 397, 399, 401, 403 Latya Road, Somdetchaopraya, Klongsan, Bangkok, 10600, Thailand
Phone: 66 (2) 861-5995 Fax: 66 (2) 861-5200

East Office
850 / 7 Soi Lat Krabang 30 / 5, Lat Krabang Road, Lat Krabang, Bangkok 10520, Thailand
Phone: 66 (0) 2734-4434 Fax: 66 (0) 2734-4438

PT HORIBA Indonesia Indonesia

Jl. Jalur Sutera Blok 20A, No.16-17, Kel. Kunciran, Kec. Pinang Tangerang-15144, Indonesia
Phone: 62 (21) 3044-8525 Fax: 62 (21) 3044-8521

HORIBA Instruments Inc. USA

Head Office
9755 Research Drive, Irvine, CA 92618, U.S.A.
Phone: 1 (949) 250-4811 Fax: 1 (949) 250-0924

Edison Office
3880 Park Avenue, Edison, NJ 08820, U.S.A.
Phone: 1 (732) 494-8660 Fax: 1 (732) 549-5125

HORIBA Instruments Brasil, Ltda. Brazil

Rua: Presbitero Plinio Alves de Souza, 645, Loteamento Polo Multivias Bairro Medeiros-Jundiá Sao Paulo CEP 13.212-181 Brazil
Phone: 55 (11) 2923-5400 Fax: 55 (11) 2923-5490

HORIBA Jobin Yvon SAS France

16-18 rue du Canal, 91165, Longjumeau Cedex, France
Phone: 33 (1) 69-74-72-00 Fax: 33 (1) 69-09-07-21

HORIBA Jobin Yvon GmbH Germany

Neuhofstrasse 9, D_64625, Bensheim
Phone: 49 (89) 62-51-84-750 Fax: 49 (89) 62-51-84-7520

HORIBA ITALIA Srl Italy

Via Luca Gaurico 209-00143, Roma, Italy
Phone: 39 (6) 51-59-22-1 Fax: 39 (6) 51-96-43-34

HORIBA UK Ltd. UK

2 Dalston Gardens, Stanmore, Middx HA7 1BQ, Great Britain, UK
Phone: 44 (208) 204-8142 Fax: 44 (208) 204-6142