

## DSS-IGA(2-2)010

Indium Gallium Arsenide Solid State Detector

ELEMENTAL ANALYSIS
FLUORESCENCE
GRATINGS & OEM SPECTROMETERS
OPTICAL COMPONENTS
FORENSICS
PARTICLE CHARACTERIZATION
RAMAN
SPECTROSCOPIC ELLIPSONOMETRY
SPR IMAGING


An indium gallium arsenide photodiode, available in three different cooling levels, provides good spectral response in the near-IR.

If you need a single point detector to measure signals in the NIR spectral region, the solid state InGaAs detector from HORIBA Scientific is an excellent choice. With high sensitivity ( $D^*$ ) and three options for ambient, thermoelectric, and liquid nitrogen cooling, responsivity extends from 1000 nm to 2500 nm. This is one of a number of single point detectors available from HORIBA Scientific. Contact us for further information.

Used in conjunction with optically optimized housings, these detectors integrate seamlessly with HORIBA's extensive selection of monochromators. In addition, the SpectrAcq2 acquisition module allows for software integration with LabSpec, SynerJY, or LabVIEW. With all of the additional Optical Building Blocks available from HORIBA, a user can easily go from individual components to a complete spectroscopy solution.

### Features and Benefits


- Wide spectral responsivity from 1000 nm to 2500 nm
- High sensitivity ( $D^* \sim 10^{12}$ )
- Compact ambient and TE detector housing
- Down-looking LN2 housing

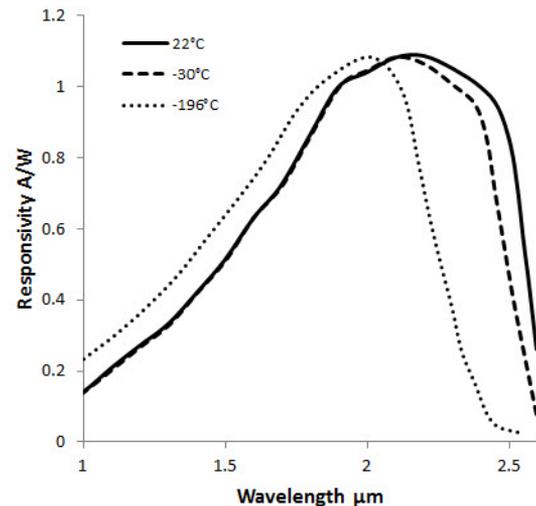

### Accessories

Various accessories are available for powering the detectors, optically coupling detectors to HORIBA monochromators, and data acquisition.


- Power supply for TE cooled detector, DSS-15V-TEP
- Power supply for ambient, DSS-15VP
- Mirror-based housing, 1427C
- BNC cable, J30646
- SpectrAcq2 data acquisition module
- SMA fiber adapter, DSS-SMA
- Dual 1427C housing adapter, J23078370
- Dual detector housing, J23079050
- BNC switchbox for dual detectors, SWB-AB

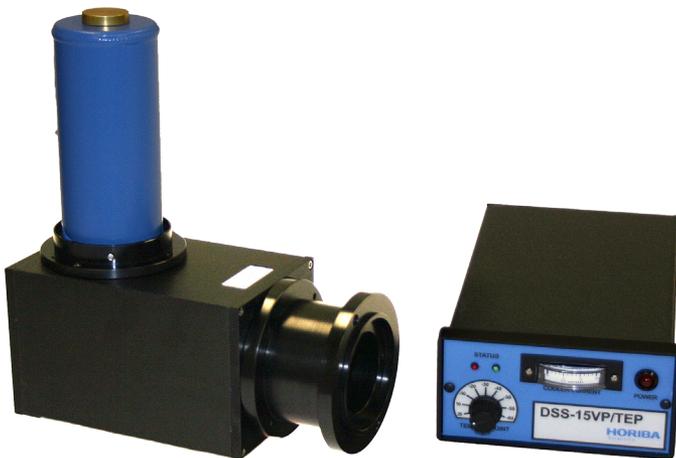


## Specifications

<b>Part number</b>	DSS-IGA(2-2)010A	DSS-IGA(2-2)010T	DSS-IGA(2-2)010L
<b>Detector type</b>	1 mm diameter indium gallium arsenide photodiode		
<b>Operating temperature (°C)</b>	22°C ambient	-30°C TE cooled	-196°C LN2 cooled
<b>Operating wavelength (µm)</b>	1.2 – 2.5 µm	1.0 – 2.3 µm	1.3 – 2.2 µm
<b>Responsivity (V/W @ peak)</b>	0.9 x 10 <sup>6</sup> / 0.9 x 10 <sup>5</sup>	1.2 x 10 <sup>6</sup> / 10 <sup>5</sup>	2.0 x 10 <sup>9</sup> / 2.0 x 10 <sup>8</sup>
<b>Noise (V/Hz<sup>1/2</sup>)</b>	4.5 x 10 <sup>-6</sup> / 0.5 x 10 <sup>-6</sup>	5.0 x 10 <sup>-7</sup> / 10 <sup>-6</sup>	
<b>NEP pk, (W/Hz<sup>1/2</sup>)</b>	< 5.0 x 10 <sup>-12</sup>	< 5.0 x 10 <sup>-13</sup>	< 1.0 x 10 <sup>-13</sup>
<b>Detectivity (D*)</b>	1.77 x 10 <sup>11</sup>	1.77 x 10 <sup>12</sup>	8.86 x 10 <sup>12</sup>
<b>Bandwidth (-3dB – Hz, typical)</b>	DC – 2 kHz	DC – 2 kHz	DC – 500 / 2500 Hz
<b>Power requirements</b>	± 9 VDC to ± 15 VDC		
<b>Connections</b>	BNC signal output. Shielded power cable terminated with a DB-9 connector directly couples the unit with the PS/TC-1 Low Noise Power Supply / Controller.		



## Mechanical Dimensions, Ambient and TE Housing

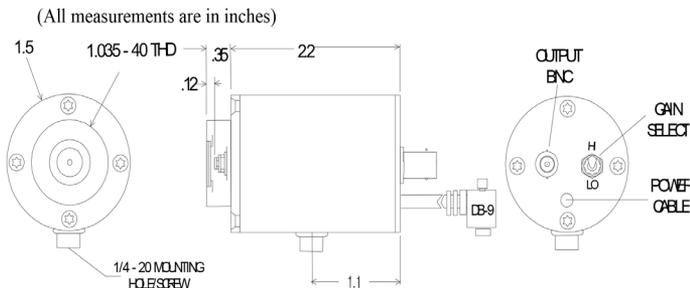


## Electrical Diagrams, Ambient/LN2 and TE Cooled

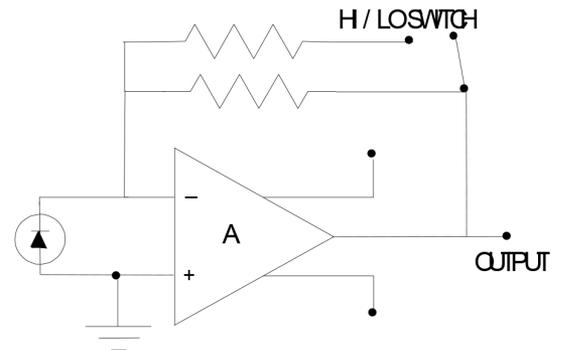

## Electrical Diagrams, LN2 Housing

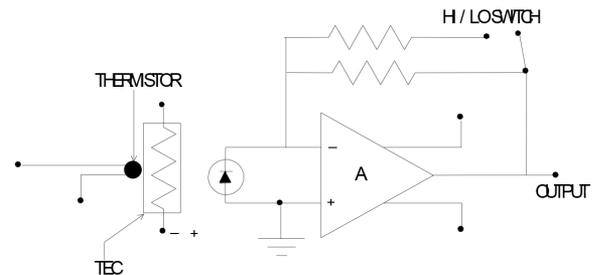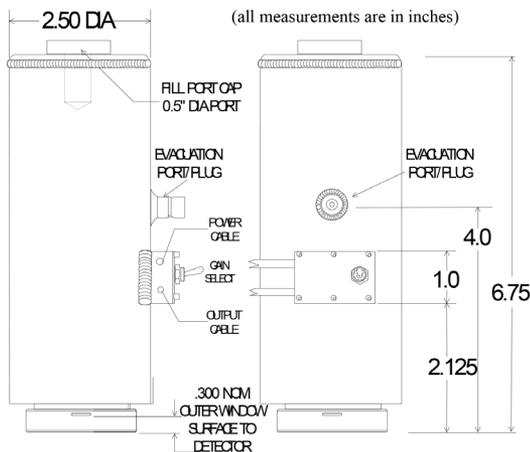

## DB-9 Pin Out Diagrams, TE Cooled [Ambient/LN2]



- |                            |             |
|----------------------------|-------------|
| 1. Cooler (+) [No connect] | 6. +V       |
| 2. Cooler (-) [No connect] | 7. -V       |
| 3. Thermistor [No connect] | 8. GND      |
| 4. Thermistor [No connect] | 9. Case GND |
| 5. No connect              |             |



**OPTICAL BUILDING BLOCKS**



**HORIBA**  
Scientific

[info.sci@horiba.com](mailto:info.sci@horiba.com) [www.horiba.com/opticalbuildingblocks](http://www.horiba.com/opticalbuildingblocks)

**USA:** +1 732 494 8660  
**UK:** +44 (0)20 8204 8142  
**China:** +86 (0)21 6289 6060

**France:** +33 (0)1 69 74 72 00  
**Italy:** +39 2 5760 3050  
**Brazil:** +55 (0)11 5545 1500

**Germany:** +49 (0)89 4623 17-0  
**Japan:** +81 (0)3 6206 4721  
**Other:** +1 732 494 8660