

SynapsePlus BIUV

High Speed Scientific CCD Camera

ELEMENTAL ANALYSIS
FLUORESCENCE
GRATINGS & OEM SPECTROMETERS
OPTICAL COMPONENTS
FORENSICS
PARTICLE CHARACTERIZATION
RAMAN
SPECTROSCOPIC ELLIPSOMETRY
SPR IMAGING

Back illuminated UV sensor,
-80°C (-95°C) Chip formats to choose
from: 1024 x 256 pixels, 2048 x 512 pixels


Features and Benefits

- Best QE for UV spectroscopy
- Deep thermoelectric cooling
- Fast acquisition rate of more than 2200 spectra/s
- Ideal for low light level detection
- Excellent linearity
- e2V Scientific Grade 1 CCD
- Lifetime vacuum warranty
- USB 2.0 interface: 100% guaranteed data integrity
- HORIBA SynerJY or LabSpec acquisition and analysis software
- LabVIEW VI's and SDK available

Primary Applications


Primarily chosen for Raman and fine spectrum analysis, it is also well suited for studying weak spectral emissions.

- Raman
- Photoluminescence
- Absorption
- Transmission
- Reflectance
- Fast kinetics

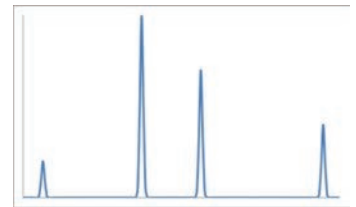

The SynapsePlus BIUV scientific CCD camera is the ideal camera for low light level and fine spectra applications such as Raman spectroscopy. Available in two different chip array formats with peak quantum efficiency of 75%, the SynapsePlus BIUV is capable of rapid acquisition speeds, greater than 2200 spectra/s.


QE Curve, SynapsePlus BIUV CCD

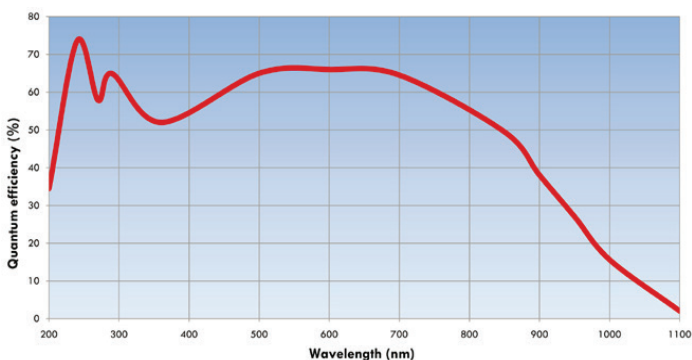

Specifications

Sensor	1024 x 256, Back-Illuminated UV-coated (BIUV), Scientific Grade 1			2048 x 512, Back-Illuminated UV-coated (BIUV), Scientific Grade 1		
Active pixels	1024 x 256			2048 x 512		
Pixel size	26 μm x 26 μm			13.5 μm x 13.5 μm		
Image area	26.6 mm x 6.7 mm, 100% fill factor			27.6 mm x 6.9 mm, 100% fill factor		
Pixel well depth	500,000 e ⁻			250,000 e ⁻		
Register well depth	1,000,000 e ⁻					
Non-linearity (Measured at all speeds per camera)	<0.40%					
Readout Noise (e⁻): Typ. (Max)	50 kHz: 4 (7)	1 MHz: 12 (15)	3 MHz: 15 (30)	50 kHz: 2.5 (4)	1 MHz: 7 (12)	3 MHz: 11 (15)
Dark current at -80°C (e⁻/pixel/s)	<0.004			<0.002		
Maximum spectra per second	Full vertical bin: 363 ROI mode 20 rows: 1795 ROI mode 8 rows: 2247			Full vertical bin: 181 ROI mode 32 rows: 1795 ROI mode 8 rows: 2247		
Software-adjustable gain (e⁻/count)	Selectable from 1.0 to 13.5					
Digitization	16-bit ADC					
Vertical shift rates (μs)	9.3, 18.4, 36.5 software-selectable					
Cooling at +20°C	Air-cooled: -75°C (guaranteed), -80°C (typical) Liquid-cooling recirculator: -90°C (guaranteed), -95°C (typical)					
Power requirements AC-DC power supply (provided)	AC input 90-264 VAC, 47-63 Hz DC output, +9 V, 6.44 A maximum					
Physical dimensions	Length: 181 mm (7.14")	Width: 113 mm (4.45")	Height: 113 mm (4.45")			
Physical weight	2.10 kg (4.64 lb)					

Mechanical Dimensions

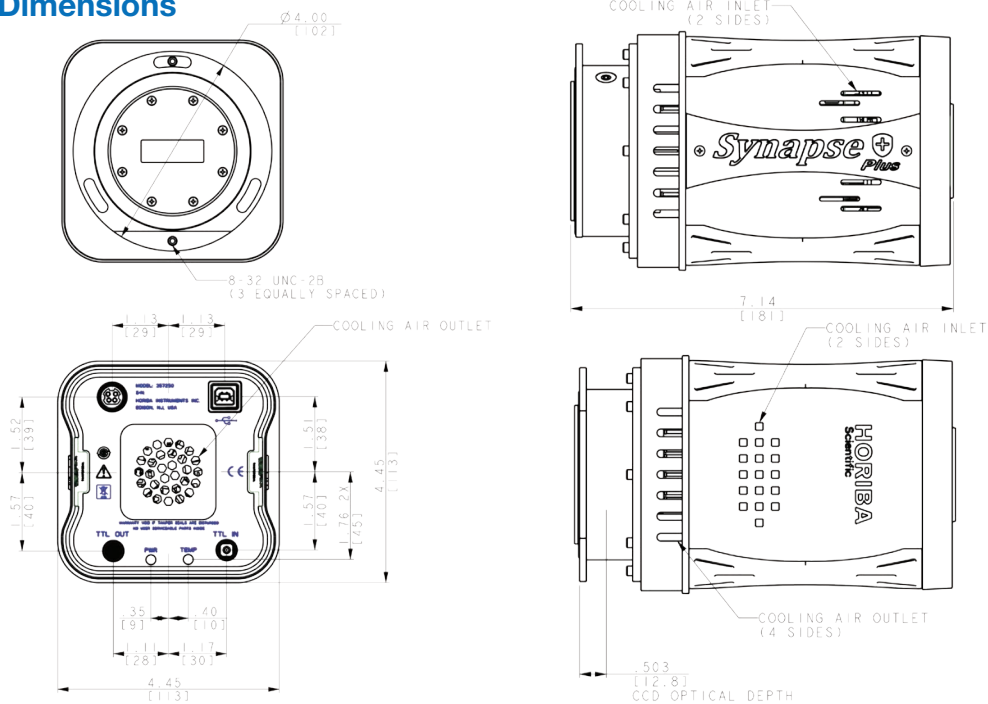

info.sci@horiba.com www.horiba.com/osd

USA: +1 732 494 8660
UK: +44 (0)20 8204 8142
China: +86 (0)21 6289 6060

France: +33 (0)1 69 74 72 00
Italy: +39 2 5760 3050
Brazil: +55 (0)11 2923 5400

Germany: +49 (0)6251 8475 0
Japan: +81 (0)3 6206 4721
Other: +1 732 494 8660

HORIBA
Scientific