

## Flat Carbon Sensor Conductivity meter

# HE-960LF / FS-09F-1/2

### Perfect for Slurry concentration control

It is effective to keep the dilution of Slurry constant. Maintaining an appropriate conductivity value contributes to process stability in the wafer polishing process. Even highly viscous sample liquids such as CMP Slurry can be measured without problems because they use a sensor structure that reduces the risk of the sample liquid sticking to the electrodes. In addition, the sensor is made of a wetted material with excellent chemical resistance, which meets the cleanliness requirements of semiconductor processes. In addition to the above, it can also be used for introduction at the semiconductor process development stage and conductivity control of special chemicals.



### Key features

#### High accuracy / High stability

- Measurement range : 0 to 2,000  $\mu\text{S}/\text{cm}$  , 0 to 10,000  $\mu\text{S}/\text{cm}$
- Repeatability :  $\pm 0.5\%$  F/S ,  $\pm 1.0\%$  F/S

#### Metal contamination free

Since special carbon is used for the electrode material, there is no need to worry about metal contamination elution.

#### Equipped with concentration conversion function

Two types of concentration conversion are possible by inputting the relationship between the chemical concentration and conductivity and the temperature characteristics.


It is especially suitable for dilution control of low-concentration chemicals.

#### Space saving

The degree of freedom in installation layout is improved by downsizing from our conventional conductivity sensor.

### Example of installation

Slurry supply device

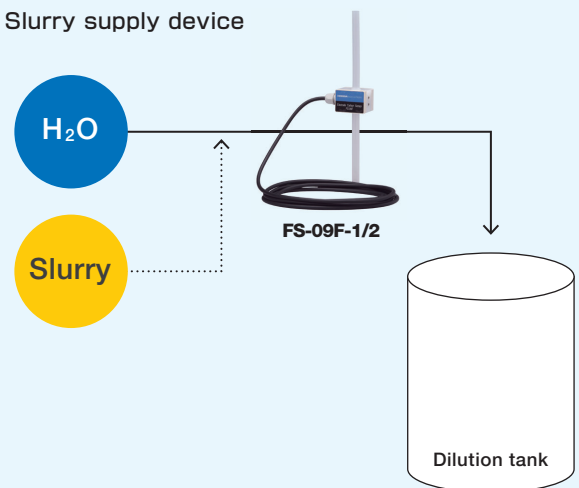


仕様

■ Specification converter

Product name	Conductivity meter		
Model	HE-960LF		
Measurement method	Electrode type (2-electrode method)		
Temperature specifications sensor	Platinum resistance 1000Ω/℃		
Measurement range	Cell constant	0.1/cm	1.0/cm
	Conductivity	0.00 to 20.00μS/cm	0.0 to 200.0μS/cm
		0.0 to 200.0μS/cm	0 to 2000μS/cm
		0 to 1000μS/cm	0 to 10000μS/cm
Temperature	0 to 100℃ Actual temperature measuring range depend on the performance of the sensor connected.		
Concentration conversion	Option 1,2	0 to 10.000% Conversion formula is defined by user (temperature compensation and concentration conversion)	
Repeatability	Cell constant	0.1/cm	1.0/cm
	Conductivity	0.00 to 20.00μS/cm range	0.0 to 200.0μS/cm range
		0.0 to 200.0μS/cm range	0 to 2000μS/cm range
		0 to 1000μS/cm range	0 to 10000μS/cm range
Temperature	±0.5℃		
Condition	Equivalent input		
Linearity	Cell constant	0.1/cm	1.0/cm
	Conductivity	0.00 to 20.00μS/cm range	0.0 to 200.0μS/cm range
		0.0 to 200.0μS/cm range	0 to 2000μS/cm range
		0 to 1000μS/cm range	0 to 10000μS/cm range
Temperature	±0.5℃		
Condition	Equivalent input		
Transmission output	Number of output:4		
	DC4 to 20mA / 0 to 20mA input/output isolated type		
	Maximum load resistance : 900Ω		
	Transmission output range : Free setting within measuring range (Negative terminals of each transmission output channel are connected inside and thus have the same electrical potential.)		
Contact output	Number of relay:5		
	ALARM contact R1,R2,R3 and R4		
	Contact type relay : Relay contact, SPST (1a)		
	Contact rating:240 V AC, 1 A or 30 V DC, 1 A(resistance load)		
	Contact function Upper or lower ON/OFF alarm each measurement items.		
	Contact action Closed when status is in the event.		
Contact input	Number of input:1		
	Contact type:open collector. No-voltage contact		
	Function : Hold command		
	Communication output		
	RS-485 communication		
	Self-check		
Temperature compensation of conductivity	Sensor diagnosis (Short-circuit and disconnection of the temperature sensor). Converter error		
	● Arbitrary temperature coefficient entry (reference temperature : 25℃, temperature coefficient : 0%/℃ to 5%/℃)		
	● Arbitrary temperature compensation formula entry (reference temperature : 25℃, formula is defined by user)		
Temperature compensation range	● No temperature compensation is performed.		
	0 to 100℃ The temperature compensation under 0℃ and over 100℃ is expanded by a function		
Ambient temperature	5 to 45℃		
Relative humidity	-25 to 65℃		
Power supply	Rated voltage 24 V DC, 10W (max.)		
Structure	Indoor-use panel installation type		
	Panel case : ABS, terminal : PBT Panel : IP65 dust and water proof structure		
Conforming standards	CE Marking	EMC Directive : EN61326-2-3	
	FCC Rule	FCC Part15	
Mass	Approx. 550g		
External dimensions	96 (W) × 96 (H) × 115 (D) mm		
	Case depth : approx. 105mm (when panel-mounted)		
Compatible sensors	FS-09F-1/2		

Dimensions (mm)

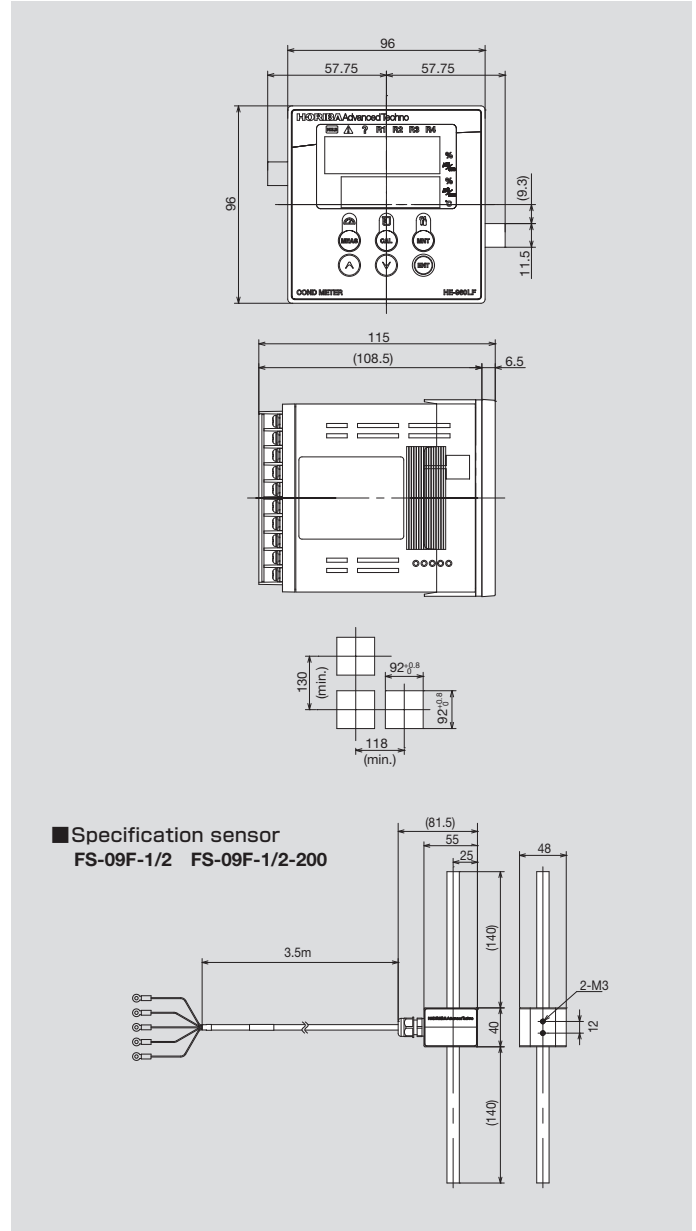

■ Specification sensor  
FS-09F-1/2 FS-09F-1/2-200

■ Specification sensor

Model	FS-09F-1/2	FS-09F-1/2-200
Wetted material	Glass carbon, PFA, Kalrez® 6375	
pipe size	1/2 inch	
Flow rate	0L/min to 10 Keep enough flow rate to measure latest sample.	
Sample pressure	0 to 0.3MPa (Temperature : 20 to 30 degree℃)	
Sample temperature	20~30 degree℃ If the difference between the ambient temperature and the sample liquid temperature is 5 degree℃, a measurement error of about 1 degree℃ will occur.	
Cable length	Approx. 3.5m	

**IMS** The HORIBA Group adopts IMS (Integrated Management System) which integrates Quality Management System ISO9001, Environmental Management System ISO14001, and Occupational Health and Safety Management System ISO45001. We have now integrated Business Continuity Management System ISO22301 in order to provide our products and services in a stable manner, even in emergencies.

**⚠ Please read the operation manual before using this product to assure safe and proper handling of the product.**

- The specifications, appearance or other aspects of products in this catalog are subject to change without notice.
- Please contact us with enquiries concerning further details on the products in this catalog.
- The color of the actual products may differ from the color pictured in this catalog due to printing limitations.
- It is strictly forbidden to copy the content of this catalog in part or in full.
- The screen displays shown on products in this catalog have been inserted into the photographs through compositing.
- All brand names, product names and service names in this catalog are trademarks or registered trademarks of their respective companies.

**HORIBA Advanced Techno**

Head Office  
31 Miyanonishi-cho, Kisshoin, Minami-ku, Kyoto, 601-8306, Japan  
Phone: 81 (75) 321-7184 Fax: 81 (75) 321-7291  
http://www.horiba-adt.jp

**HORIBA**

Group Head Office  
2 Miyanohigashi-cho, Kisshoin, Minami-ku, Kyoto, 601-8510, Japan  
Phone: 81 (75) 313-8121 Fax: 81 (75) 321-5725  
http://www.horiba.com

Bulletin:HAE-T0157Aa

Printed in Japan 2010SK00