

Flat Carbon Sensor Conductivity meter

HE-960LF / FS-09F-1/2

Perfect for Slurry concentration control

It is effective to keep the dilution of Slurry constant. Maintaining an appropriate conductivity value contributes to process stability in the wafer polishing process. Even highly viscous sample liquids such as CMP Slurry can be measured without problems because they use a sensor structure that reduces the risk of the sample liquid sticking to the electrodes. In addition, the sensor is made of a wetted material with excellent chemical resistance, which meets the cleanliness requirements of semiconductor processes. In addition to the above, it can also be used for introduction at the semiconductor process development stage and conductivity control of special chemicals.



Key features

High accuracy / High stability

- Measurement range : 0 to 2,000 $\mu\text{S}/\text{cm}$, 0 to 10,000 $\mu\text{S}/\text{cm}$
- Repeatability : $\pm 0.5\%$ F/S , $\pm 1.0\%$ F/S

Metal contamination free

Since special carbon is used for the electrode material, there is no need to worry about metal contamination elution.

Equipped with concentration conversion function

Two types of concentration conversion are possible by inputting the relationship between the chemical concentration and conductivity and the temperature characteristics.


It is especially suitable for dilution control of low-concentration chemicals.

Space saving

The degree of freedom in installation layout is improved by downsizing from our conventional conductivity sensor.

Example of installation

Slurry supply device

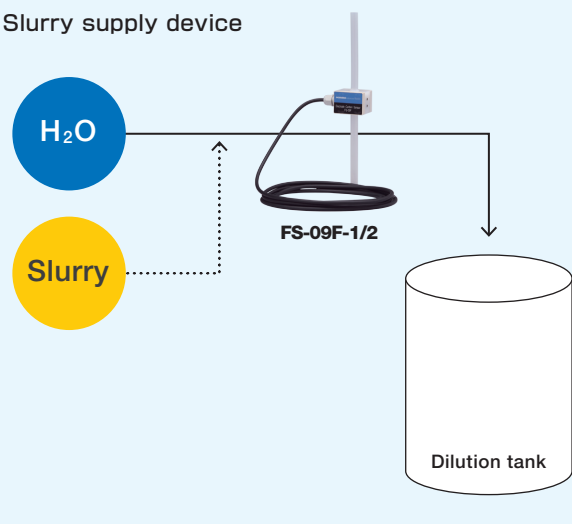


仕様

■ Specification converter

Product name		Conductivity meter	
Model		HE-960LF	
Measurement method		Electrode type (2-electrode method)	
Temperature specifications sensor		Platinum resistance 1000Ω/℃	
Measurement range	Cell constant	0.1/cm	1.0/cm
	Conductivity	0.00 to 20.00μS/cm	0.0 to 200.0μS/cm
		0.0 to 200.0μS/cm	0 to 2000μS/cm
		0 to 1000μS/cm	0 to 10000μS/cm
		*Measuring range of raw conductivity Switched with setting change	
Temperature	0 to 100℃ Actual temperature measuring range depend on the performance of the sensor connected.		
Concentration conversion	Option 1,2	0 to 10.000% Conversion formula is defined by user (temperature compensation and concentration conversion)	
Repeatability	Cell constant	0.1/cm	1.0/cm
	Conductivity	0.00 to 20.00μS/cm range	0.0 to 200.0μS/cm range
		0.0 to 200.0μS/cm range	0 to 2000μS/cm range
		0 to 1000μS/cm range	0 to 10000μS/cm range
Temperature	±0.5℃		
Linearity	Condition	Equivalent input	
	Cell constant	0.1/cm	1.0/cm
	Conductivity	0.00 to 20.00μS/cm range	0.0 to 200.0μS/cm range
		0.0 to 200.0μS/cm range	0 to 2000μS/cm range
		0 to 1000μS/cm range	0 to 10000μS/cm range
	Temperature	±0.5℃	
Condition	Equivalent input		
Transmission output		Number of output:4 DC4 to 20mA / 0 to 20mA input/output isolated type Maximum load resistance : 900Ω Transmission output range : Free setting within measuring range (Negative terminals of each transmission output channel are connected inside and thus have the same electrical potential.)	
Contact output		Number of relay:5 ALARM contact R1,R2,R3 and R4 Contact type relay : Relay contact, SPST (1a) Contact rating:240 V AC,1 A or 30 V DC, 1 A(resistance load) Contact function Upper or lower ON/OFF alarm each measurement items. Contact action Closed when status is in the event. Opened when any erroneous status is normal or power is down. R1,R2 and R3 share a common terminal. Self diagnosis contact RF Contact type : relay contact , SPDT (1c) Contact rating:240 V AC,1 A or 30 V DC, 1 A(resistance load) C-NO contact action : Closed when status is normal. Opened when any erroneous status is detected or power is down. R4 and RF share a common terminal.	
Contact input		Number of input:1 Contact type:open collector. No-voltage contact Function : Hold command	
Communication output		RS-485 communication	
Self-check		Sensor diagnosis (Short-circuit and disconnection of the temperature sensor). Converter error	
Temperature compensation of conductivity		● Arbitrary temperature coefficient entry (reference temperature : 25℃, temperature coefficient : 0%/℃ to 5%/℃) ● Arbitrary temperature compensation formula entry (reference temperature : 25℃, formula is defined by user) ● No temperature compensation is performed.	
Temperature compensation range		0 to 100℃ The temperature compensation under 0℃ and over 100℃ is expanded by a function	
Ambient temperature		5 to 45℃	
Relative humidity		-25 to 65℃	
Power supply		Rated voltage 24 V DC, 10W (max.)	
Structure		Indoor-use panel installation type Panel case : ABS, terminal : PBT Panel : IP65 dust and water proof structure	
Conforming standards		CE Marking	EMC Directive : EN61326-2-3
Mass		FCC Rule	FCC Part15
External dimensions		Approx. 550g	
Compatible sensors		96 (W) × 96 (H) × 115 (D) mm Case depth : approx. 105mm (when panel-mounted)	
		FS-09F-1/2	

Dimensions (mm)

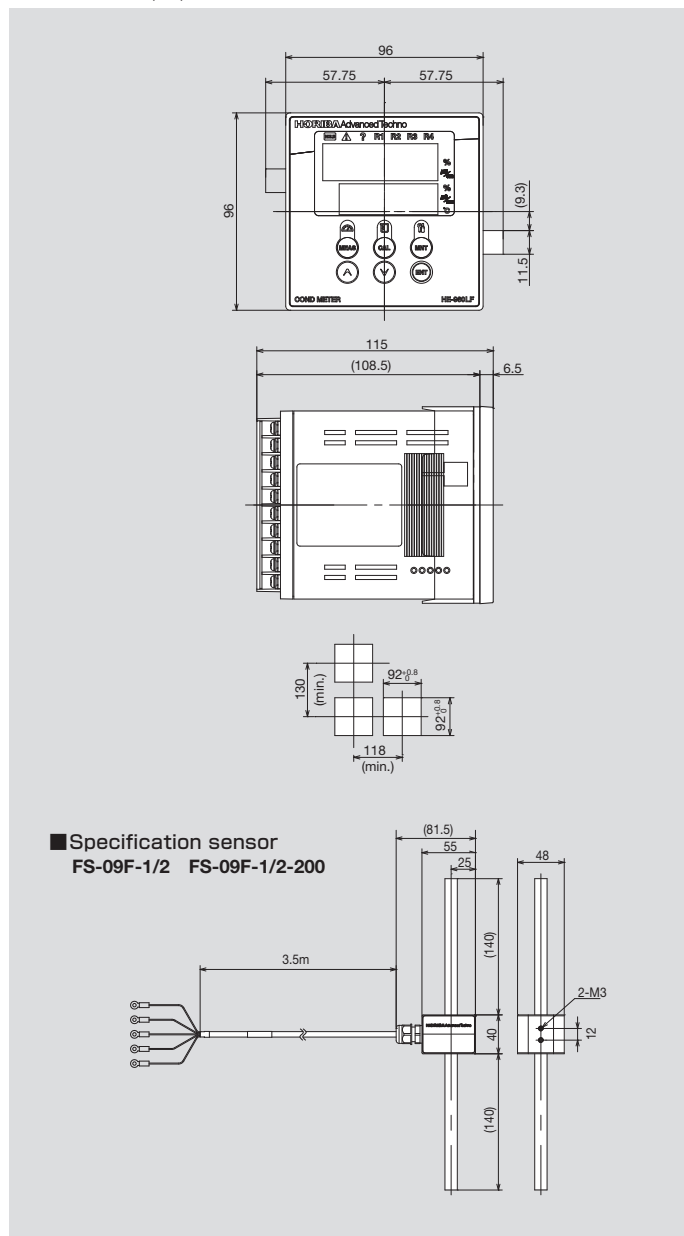

■ Specification sensor FS-09F-1/2 FS-09F-1/2-200

■ Specification sensor

Model	FS-09F-1/2	FS-09F-1/2-200
Wetted material	Glass carbon, PFA, Kalrez® 6375	
pipe size	1/2 inch	
Flow rate	0L/min to 10	
	Keep enough flow rate to measure latest sample.	
Sample pressure	0 to 0.3MPa (Temperature : 20 to 30 degree℃)	
Sample temperature	20~30 degree℃	
	If the difference between the ambient temperature and the sample liquid temperature is 5 degree℃, a measurement error of about 1 degree℃ will occur.	
Cable length	Approx. 3.5m	



The HORIBA Group adopts IMS (Integrated Management System) which integrates Quality Management System ISO9001, Environmental Management System ISO14001, and Occupational Health and Safety Management System ISO45001. We have now integrated Business Continuity Management System ISO22301 in order to provide our products and services in a stable manner, even in emergencies.



Please read the operation manual before using this product to assure safe and proper handling of the product.

- The specifications, appearance or other aspects of products in this catalog are subject to change without notice.
- Please contact us with enquiries concerning further details on the products in this catalog.
- The color of the actual products may differ from the color pictured in this catalog due to printing limitations.
- It is strictly forbidden to copy the content of this catalog in part or in full.
- The screen displays shown on products in this catalog have been inserted into the photographs through compositing.
- All brand names, product names and service names in this catalog are trademarks or registered trademarks of their respective companies.

HORIBA Advanced Techno

Head Office
31 Miyanonishi-cho, Kisshoin, Minami-ku, Kyoto, 601-8306, Japan
Phone: 81 (75) 321-7184 Fax: 81 (75) 321-7291
http://www.horiba-adt.jp

HORIBA

Group Head Office
2 Miyahonigashi-cho, Kisshoin, Minami-ku, Kyoto, 601-8510, Japan
Phone: 81 (75) 313-8121 Fax: 81 (75) 321-5725
http://www.horiba.com

Bulletin:HAE-T0157Aa

Printed in Japan 2010SK00

Explore the future

Automotive Test Systems | Process & Environmental | Medical | Semiconductor | Scientific

HORIBA