

LAQUA

Precision, in the
palm of your hand.



pH	ORP	ION	DO
Conductivity	Resistivity	Salinity	TDS

Handheld Water Quality Meters
D-70 / ES-70 / OM-70 Series



In the lab, in the field or
anywhere you need it

LAQUA



Shock-resistant

Polycarbonate resin* used in automobiles and mobile phones has been adopted to enhance shock resistance.

*Polycarbonate resin has about twice the shock resistance of conventional ABS resin.



Visible LCD in dark places

Backlight allows reading of measured values even in the dark.

*Except D-71



Waterproof and dustproof

IP67 rated waterproof and dustproof casing.

*IP67: Fully waterproof for approximately 30 minutes in 1 meter of water.



Electrode Line Up

One hand operation

Slim body fits in your hand. Only three basic operation buttons for one-hand operability.




Extended operation

Uses about 10% of the power compared to conventional meters. With up to 1000 hrs of use*, long periods of field work is possible.

*D-71/D-72

Easy to carry

The compact and ergonomic design is easy to carry and includes a cable winding hook with the optional electrode hook attachment.



Plastic Body pH Electrode
9625-10D

Waterproof plastic body pH electrode is suited for use in the field without anxiety. It can be used for various applications such as rivers and solutions.



Tap water pH electrode
9630-10D

Quick and stable measurement is possible for low conductivity samples or those with low buffering ability, such as tap water. Suitable for water quality testing at water treatment plants.




Hydrofluoric acid resistant pH electrode
9631-10D

With a long life and easy maintenance, this electrode is capable of approximately 1000 reliable measurements*. Suitable for the management of water contaminated with hydrofluoric acid resulting from an etching process.

*When a measurement is conducted for 1 minute with 1 % hydrofluoric acid solution (at 25 °C).

The casing is made from shock resistant and extremely durable polycarbonate resin. With high chemical resistance it is ideal for harsh environments.



Laboratory use capability

The optional electrode stand offers excellent manoeuvrability, allowing the electrode to be moved up and down, and from left to right, easily with one hand.



Chemical resistance

The polycarbonate resin casing is extremely chemical resistant. It can be cleaned using alcohol.

*Resistant to alcohol, weak acid, bases and oil.



Easy-to-view large display shows two measurement values simultaneously

The measurement values are easily visible on a display that is about 40% larger than those of our conventional products. Two measurement values can be displayed on a single screen.

*For selected models, an optional cable is necessary to connect to a computer. The software can be downloaded after user registration.



Various data processing

The built-in data memory can store 1000 items, and connecting to a computer allows measurement data to be collected. Output to a GLP/GMP-compatible printer is also possible.

*For selected models, an optional cable is necessary to connect to a computer. The software can be downloaded after user registration.



Alkali resistant pH electrode

9632-10D

A strong alkali resistance achieves approximately five times* longer stability than that of our conventional products. Suitable for use with strong alkali samples such as plating solutions.

*With 0.1 mol/L sodium hydroxide solution (about pH 13) (at 60°C).



ISFET pH Electrode

0040-10D(Flat Type)
0030-10D(Needle Type)

A semiconductor sensor eliminates the risk of breakage which may occur in glass electrodes. Suitable for surface and inner measurements of solids.

【Various functions】

LAQUAact boasts a variety of safety and other useful functions to assist with measurements and data processing. For details, see page 6 for the specifications.

Common	Interval measurement function (except D-71)
	Sample ID number setting function
	Clock function and auto power-off function
pH 【D-70 series】	Usable with AAA alkaline batteries, Ni-MH batteries, or AC adapter
	Automatic calibration and calibration interval alarm function
Conductivity 【D-74/ES-71】	Usable with both 5-point calibration and USA/NIST standard solutions
	Electrical resistivity/total dissolved solids/salt content conversion functions
Dissolved Oxygen 【D-75/OM-71】	Automatic range switching, automatic temperature conversion, and unit switching functions
	Temperature compensation, atmospheric pressure calibration and salt concentration calibration functions
	Oxygen concentration and saturated oxygen concentration measurement functions

A meter to match your every need.

meter + electrode set

What do you measure?
First, select a meter.

(Meter accessories: User's Manual, Quick Guide, AAA alkaline batteries x 2)



Line-up of electrodes based on various applications.

pH Meters



D-71
CH.1 **pH**

WATER PROOF ID
SHOCK PROOF



D-72
CH.1 **pH** **ORP**

BACK LIGHT WATER PROOF ID PC
PRT SHOCK PROOF


Conductivity Meter



ES-71
CH.1 **COND** **RESI**
SAL **TDS**

BACK LIGHT WATER PROOF ID PC
PRT SHOCK PROOF

Multi-Parameter Meters



D-73 pH-Ion
CH.1 **pH** **ORP** **ION**
CH.2 **pH** **ORP** **ION**

BACK LIGHT 2CH WATER PROOF ID
PC PRT SHOCK PROOF



D-74 pH-EC
CH.1 **pH** **ORP**
CH.2 **COND** **RESI**
SAL **TDS**

BACK LIGHT 2CH WATER PROOF ID
PC PRT SHOCK PROOF

Dissolved Oxygen Meter



OM-71
CH.1 **DO**





BACK LIGHT WATER PROOF ID PC
PRT SHOCK PROOF



D-75 pH-DO
CH.1 **pH** **ORP**
CH.2 **DO**

BACK LIGHT 2CH WATER PROOF ID
PC PRT SHOCK PROOF


pH electrode

- General purpose electrode 9625-10D
 Pb Free WATER PROOF
- Tap water pH electrode 9630-10D
 Pb Free WATER PROOF
- HF acid-resistant pH electrode 9631-10D
 Pb Free WATER PROOF
- Alkali-resistant pH electrode 9632-10D
 Pb Free WATER PROOF
- ISFET electrode
0040-10D (Flat type) WATER PROOF
0030-10D (Needle type) WATER PROOF



ORP electrode

- Metallic electrode platinum 3-in-1 type 9300-10D
 WATER PROOF

Electrical conductivity cell

- Immersion type 9382-10D
 WATER PROOF

Dissolved Oxygen electrode

- Laboratory use 9520-10D
 WATER PROOF
- Field use
9551-20D (2m Cable)
9551-100D (10m Cable)
 WATER PROOF

- Backlit LCD
- 2-channel measurement
- PC connection compatible*
- Printer output compatible (Printer sold separately)
- Waterproof and dustproof (IP67 rated)
- Security function
- Shock and chemical resistant body case

Recommended

Packages (Complete sets with meter, electrode, and standard solutions)



D-71A-S

Waterproof Portable pH meter, complete with

- plastic pH electrode (9625-10D)
- US buffer set & 3.33M KCl reference electrolyte (502-S)

D-71A-K

Waterproof Portable pH meter, complete with

- Carry-case
- plastic pH electrode (9625-10D)
- pH 7 buffer, 60ml
- pH 4 buffer, 60ml
- pH 10 buffer, 60ml
- 3.33M KCl, 60ml



D-72A-S

Waterproof Portable pH / ORP meter, complete with

- plastic pH electrode (9625-10D)
- US buffer set & 3.33M KCl reference electrolyte (502-S)

D-72A-K

Waterproof Portable pH / ORP meter, complete with

- Carry-case
- plastic pH electrode (9625-10D)
- pH 7 buffer, 60ml
- pH 4 buffer, 60ml
- pH 10 buffer, 60ml
- 3.33M KCl, 60ml



D-73A-S

Waterproof Portable pH / ORP / Ion meter, complete with

- plastic pH electrode (9625-10D)
- US buffer set & 3.33M KCl reference electrolyte (502-S)

D-73A-K

Waterproof Portable pH / ORP / Ion meter, complete with

- Carry-case
- plastic pH electrode (9625-10D)
- pH 7 buffer, 60ml
- pH 4 buffer, 60ml
- pH 10 buffer, 60ml
- 3.33M KCl, 60ml



D-74A-S

Waterproof Portable pH / ORP / COND meter, complete with

- plastic pH electrode (9625-10D)
- plastic conductivity electrode (9382-10D)
- US buffer set & 3.33M KCl reference electrolyte (502-S)
- conductivity standard solutions 84 uS, 1413 uS, 12.88 mS, & 111.9 mS (503-S)

D-74A-K

Waterproof Portable pH / ORP / COND meter, complete with

- Carry-case
- plastic pH electrode (9625-10D)
- plastic conductivity electrode (9382-10D)
- pH 7 buffer, 60ml
- pH 4 buffer, 60ml
- 1413 uS Standard, 60ml
- 12.88 mS Standard, 60ml



D-75A-S

Waterproof Portable pH / ORP / DO meter, complete with

- plastic pH electrode (9625-10D)
- US buffer set & 3.33M KCl reference electrolyte (502-S)
- Field dissolved oxygen electrode with 2m cable (9551-20D)

D-75A-K

Waterproof Portable pH / ORP / DO meter, complete with

- Carry-case
- plastic pH electrode (9625-10D)
- Field dissolved oxygen electrode (9551-20D)
- pH 7 buffer, 60ml
- pH 4 buffer, 60ml
- pH 10 buffer, 60ml
- 3.33M KCl, 60ml



ES-71A-S

Waterproof Portable Conductivity / Resistivity / Salinity / TDS meter, complete with

- plastic conductivity electrode (9382-10D)
- conductivity standard solutions 84 uS, 1413 uS, 12.88 mS, & 111.9 mS (503-S)

ES-71A-K

Waterproof Portable Conductivity / Resistivity / Salinity / TDS meter, complete with

- Carry-case
- plastic conductivity electrode (9382-10D)
- 1413 uS Standard, 60ml
- 12.88 mS Standard, 60ml



OM-71G-2

Waterproof Portable Dissolved Oxygen meter, complete with

- Field dissolved oxygen electrode (9551-20D)

OM-71-2A-K

Waterproof Portable Dissolved Oxygen meter, complete with

- Field dissolved oxygen electrode (9551-20D)
- Carry-case

pH Solution Kits

Name	Type	Specification	Remarks	Part No.
NIST pH buffer solution kit	501-S	(4.01/6.86/9.18/KCl Reference)	250mL ea	3999960015
USA pH buffer solution kit	502-S	(4.01/7.00/10.01/KCl Reference)	250mL ea	3999960016

pH Solutions

Name	Type	Specification	Remarks	Part No.
Buffer solution at 25°C	500-2	pH 1.68	500ml	3999960028
	500-4	pH 4.01	500ml	3999960029
	500-686	pH 6.86	500ml	3999960030
	500-7	pH 7.00	500ml	3999960031
	500-9	pH 9.18	500ml	3999960032
	500-10	pH 10.01	500ml	3999960033
	500-12	pH 12.46	500ml	3999960034

Conductivity Solution Kit

Name	Type	Specification	Remarks	Part No.
Conductivity standard solution kit	503-S	(84 uS/1413 uS/12.88 mS/111.8 mS)	250ml ea	3999960017

Conductivity Solutions

Name	Type	Specification	Remarks	Part No.
Conductivity Standard solution at 25°C	500-21	84 uS	500ml	3999960035
	500-22	1413 uS	500ml	3999960036
	500-23	12.88 mS	500ml	3999960037
	500-24	111.8 mS	500ml	3999960038

ORP

Name	Type	Specification	Remarks	Part No.
Powder for ORP standard solution	160-51	89 mV For 250 mL (10 packets per set)	—	3200043618
	160-22	258 mV For 250 mL (10 packets per set)	—	3200043617

Internal Filling Solution for Electrodes

Name	Type	Specification	Remarks	Part No.
Internal Filling Solution for pH Combination Electrode	525-3	3.33 M KCl	250ml	3999960023
Internal Filling Solution for Reference Electrode	300	3.33 M KCl	250ml	3200043640



Electrode Cleaning Solution

- For removing inorganic sample residues from glass electrodes, and for cleaning liquid junctions

Name	Type	Volume (mL)	Part No.
Electrode cleaning solution	220	50 x 2 pcs	3014028653

- For removing protein containing sample residues from glass electrodes, and for cleaning liquid junctions.

Name	Type	Volume (mL)	Part No.
Electrode cleaning solution	250	400	3200366771

- For 9630-10D (pH electrode for tap water or low conductivity sample)

Name	Type	Volume (mL)	Part No.
Electrode cleaning solution	230	Solution A 30 mL Solution B 100 mL	3200530494




Accessories

Name	Remarks	Part No.	F-70	DS-70	D-70	ES-70	OM-70
Printer (for GLP/GMP compliance)	Cable sold separately, Plain paper	—					
Printer cable	1.5 m	3014030148					
Printer paper	20 rolls	3014030149	○	○	1	○	○
Ink ribbon	5 pcs/set	3014030150					
AC adapter cable set.	AC adaptor 1.8 m, cable 1 m	—	○	○	○	○	○
Digital simulator X-51	pH, mV, ION, DO simulator	3014028368	○	—	○	—	○
Digital simulator X-52	Conductivity simulator	3014028370	2	○	2	○	—
USB cable	Cable to connect meter and PC.	3200373941	○	○	—	—	—
LCD protection sheet	2 pcs/pack	3200382462	○	○	—	—	—
Protection cover	Protects the meter for F-70, DS-70 series	3200382441	○	○	—	—	—
Analog cable	Analog (alarm) output cable	3014030152	3	3	—	—	—
Serial cable	Cable to connect meter and PC (Serial, 9 pins)	3014030151	○	○	1	○	○
Electrode hook	With function for winding the cable	3200528475	—	—	○	○	○
DP-70S Electrode stand (adjustable type)	With holder for D/ES/OM-70	3200528474	—	—	○	○	○
FA-70S Electrode stand (adjustable type)	Free-standing type. Height 384 mm	3200382557	○	○	○	○	○
FA-70L Electrode stand (long type)	Free-standing type. Height 450~650 mm	3200382560	○	○	○	○	○



1 Except D-71 2 Conductivity measurement model: F-74/F-74BW/D-74 3 Except F-71/F-74BW/DS-71

Dimensions Unit: mm

D-70 Series / ES-70 Series / OM-70 Series




Electrode Stand (DP-70S)

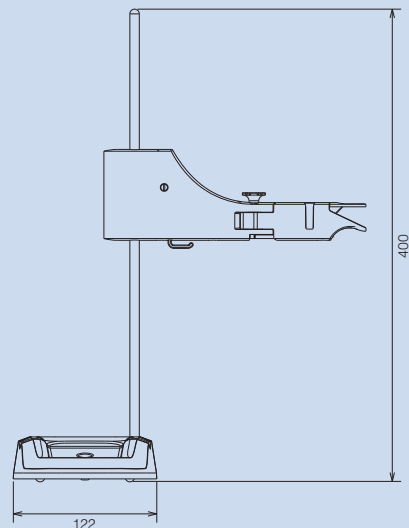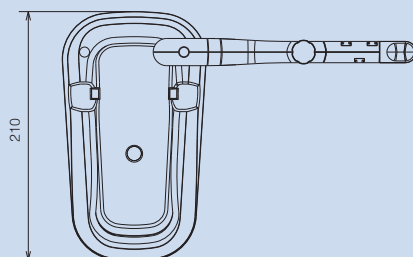

LAQUAact D-70 / ES-70 / OM-70 series specifications

		D-71	D-72	D-73	D-74	D-75	ES-71	OM-71	
pH	Measuring principle	Glass electrode method					—	—	
	Range	pH-2.00~16.00					—	—	
	Resolution	0.01 pH					—	—	
	Repeatability	±0.01 pH±1digit					—	—	
	Auto calibration (5 points)/Calibration record	●					—	—	
	Standard solution Auto-detect (5 points)	●					—	—	
	USA/NIST selectable	●					—	—	
mV (ORP)	Calibration interval alarm	●					—	—	
	Range	—	-2000~2000 mV			—	—		
	Resolution	—	1 mV			—	—		
	Repeatability	—	±1 mV±1 digit			—	—		
Temperature	Absolute/relative selectable	—	●			—	—		
	Range	0.0°C~100.0°C							
	Resolution	0.1°C							
	Repeatability	±0.1°C±1digit							
ION	Calibration function	●					—	—	
	Measuring principle	—	—	Ion electrode method	—	—	—		
	Range	—	—	0.00 µg/L~999 g/L	—	—	—		
	Resolution	—	—	3-digit valid numbers	—	—	—		
	Repeatability	—	—	±0.5% F.S.±1 digit	—	—	—		
Conductivity	5 points calibration/Calibration record	—	—	●	—	—	—		
	Measuring principle	—	—	—	2 AC bipolar method	—	2 AC bipolar method		
	Range	—	—	—	0.00 µS/cm~2000 mS/cm	—	0.00 µS/cm~2000 mS/cm		
	Resolution	—	—	—	0.05%F.S.	—	0.05%F.S.		
	Repeatability	—	—	—	±0.5% F.S.±1 digit	—	±0.5% F.S.±1 digit		
	Measurement Unit Selection (S/m,S/cm)	—	—	—	●	—	●		
Salinity	Auto temperature conversion (25°C)	—	—	—	●	—	●		
	Measuring principle	—	—	—	Conversion from conductivity value	—	Conversion from conductivity value		
	Range	—	—	—	0.00%~4.00% (0.0PPT~40.0PPT)	—	0.00%~4.00% (0.0PPT~40.0PPT)		
	Resolution	—	—	—	0.01%/0.1 PPT	—	0.01%/0.1 PPT		
Resistivity	Calibration function	—	—	—	●	—	●		
	Measuring principle	—	—	—	Conversion from conductivity value	—	Conversion from conductivity value		
	Measuring range (Display range)	—	—	—	0.0Ω•cm~20.0MΩ•cm	—	0.0Ω•cm~20.0MΩ•cm		
	Resolution	—	—	—	0.05%F.S.	—	0.05%F.S.		
TDS	Repeatability	—	—	—	±0.5%F.S.±1 digit	—	±0.5%F.S.±1 digit		
	Measuring principle	—	—	—	Conversion from conductivity value	—	Conversion from conductivity value		
	Range	—	—	—	0.01 mg/L~100 g/L	—	0.01 mg/L~100 g/L		
Dissolved Oxygen	Resolution	—	—	—	0.01 mg/L	—	0.01 mg/L		
	Measuring principle	—	—	—	—	Membrane galvanic cell	—	Membrane galvanic cell	
	Range	—	—	—	—	0.00~20.00 mg/L	—	0.00~20.00 mg/L	
	Temperature compensation	—	—	—	—	0~40°C	—	0~40°C	
	Resolution	—	—	—	—	0.01 mg/L	—	0.01 mg/L	
	Repeatability	—	—	—	—	±0.1 mg/L±1 digit	—	±0.1 mg/L±1 digit	
Saturated Oxygen	Salinity concentration correction (0~40PPT)	—	—	—	—	●	—	●	
	Air pressure correction	—	—	—	—	●	—	●	
	Measuring principle	—	—	—	—	Membrane galvanic cell	—	Membrane galvanic cell	
Oxygen concentration	Measuring range (Display range)	—	—	—	—	0.0~200.0%	—	0.0~200.0%	
	Resolution	—	—	—	—	0.1%	—	0.1%	
	Measuring principle	—	—	—	—	Membrane galvanic cell	—	Membrane galvanic cell	
Function	Measuring range (Display range)	—	—	—	—	0.0~50.0%	—	0.0~50.0%	
	Resolution	—	—	—	—	0.1%	—	0.1%	
	Display	Custom LCD		Custom LCD with backlight					
	PC connectivity	—	—	—	—	●	—	—	
	Printer connectivity (GLP/GMP)	—	—	—	—	●	—	—	
	Temperature compensation (Auto/manual)	●							
	Auto Hold function	●							
	Data memory	1000							
	Interval memory	—	—	—	—	●	—	—	
ID input	●								
Clock function	●								
Auto power off/Battery Level Indicator	●								
Dustproof and waterproof standard	IP67								
Operating ambient temperature/humidity	0°C to 45°C, 80% or less in relative humidity (no condensation)								
Power	LR03/AAA alkaline batteries or AAA Ni-H rechargeable batteries × 2, AC adapter 100 V to 240 V 50/60 Hz (option)								
Current consumption	Less than 1 mA	Less than 1 mA	Less than 2 mA	Less than 5 mA	Less than 2 mA	Less than 5 mA	Less than 2 mA	Less than 2 mA	
Battery life	Approx. 1000 hours	Approx. 1000 hours	Approx. 500 hours	Approx. 200 hours	Approx. 500 hours	Approx. 200 hours	Approx. 500 hours	Approx. 500 hours	
Dimensions	Approx. 67 (80) × 28 (42) × 170 mm (The figures in parentheses are maximum thicknesses.)								
Weight (without batteries and electrode)	Approx. 270 g	Approx. 270 g	Approx. 285 g	Approx. 285 g	Approx. 285 g	Approx. 270 g	Approx. 270 g		

With over 60 years of engineering excellence, HORIBA's diverse range of water quality analyzers and electrodes are ideal for everyday laboratory needs through to the most demanding of applications. Visit our website for a wealth of useful information and water quality measurement tips to help you obtain the best results in your work.

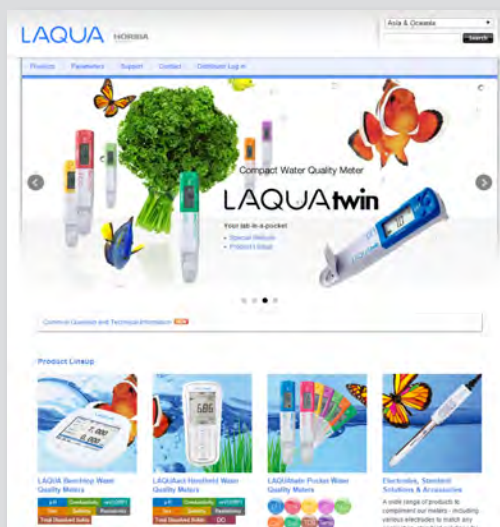

Benchtop Meters

Developed using extensive feedback from users, our new LAQUA meters deliver the best solution for water quality analysis. Our LAQUA website features an online 'Selection Guide' to enable you to find the perfect LAQUA meter and electrode for your need.



Pocket Meters

Analyzing water quality is simplified when using our LAQUAtwin range of meters. Designed to produce accurate and reliable results. Anyone, anywhere, any time can measure samples easily with a LAQUAtwin meter. See just how good they are at our website.



Electrodes

Various electrodes to match any application. A wide range of products for both benchtop and portable systems are available, including easy and reliable standard models, application-focused models for small samples or large containers, and special electrodes for specific sample characteristics.



Application Notes

LAQUAtwin pocket meters offer quick and convenient alternative to analyze important parameters with high accuracy. Several application notes are available at (<http://goo.gl/znwE6j>) detailing the use of LAQUAtwin and the results achieved for the respective applications. Additional application notes will be added when available.

SUPPORT HORIBA CUSTOMER SUPPORT SYSTEM

HORIBA offers a variety of services to conform to quality standards and international guidelines such as GLP, GMP and ISO

Technical Support
Please contact us with any technical questions about our products.
www.horiba.com/wq/support

User Support
Our support website is available for registered customers and features:
• Data collection software
• Instruction manual downloads
• Measurement tips, etc.
www.horiba.co.jp/register

Validation Support
Please contact us with any questions or requirements for your validation procedure.
• Traceability certification*
• IQ/OQ/PQ support*
• SOP guidance
• FAQ
*Optional services

Please read the operation manual before using this product to assure safe and proper handling of the product.

- The contents of this catalog are subject to change without prior notice, and without any subsequent liability to this company.
- The color of the actual products may differ from the color pictured in this catalog due to printing limitations.
- It is strictly forbidden to copy the content of this catalog in part or in full.
- All brand names, product names and service names in this catalog are trademarks or registered trademarks of their respective companies.
- Windows is a registered trademark of Microsoft Corporation in the United States and other countries.

<http://www.horiba.com> e-mail: laqua@horiba.com

HORIBA Instruments (Singapore) Pte. Ltd.

83 Science Park Drive
#02-02A, The Curie
Singapore 118258
Phone: 65 (6) 908-9660
Fax: 65 (6) 745-8155



Brochure HLA-09-2014B