
HORIBA Scientific



DSS-IA020

Indium Arsenide Solid State Detector

An indium arsenide photodiode, available in two different cooling levels, provides good spectral response in the near-IR.







If you need a single point detector to measure signals in the NIR spectral region, the solid state InAs detector from HORIBA Scientific is an excellent choice. With high sensitivity (D*) and two options for ambient and thermoelectric cooling, responsivity extends from 1000 nm to 3500 nm. This is one of a number of single point detectors available from HORIBA Scientific. Contact us for further information.


Used in conjunction with optically optimized housings, these detectors integrate seamlessly with HORIBA's extensive selection of monochromators. In addition, the SpectrAcq2 acquisition module allows for software integration with LabSpec, SynerJY, or LabVIEW. With all of the additional optical adapters available from HORIBA, a user can easily go from individual components to a complete spectroscopy solution.





Features and Benefits

- Wide spectral responsivity from 1000 nm to 3500 nm
- High sensitivity (D*~10¹¹)
- Compact ambient and TE detector housing



Accessories

Various accessories are available for powering the detectors, optically coupling detectors to HORIBA monochromators, and data acquisition.


- Power supply for TE cooled detector, DSS-15V-TEP
- Power supply for ambient, DSS-15VP
- Mirror-based housing, 1427C
- BNC cable, J30646
- SpectrAcq2 data acquisition module
- SMA fiber adapter, DSS-SMA
- Dual 1427C housing adapter, J23078370
- Dual detector housing, J23079050
- BNC switchbox for dual detectors, SWB-AB

Specifications


Part number	DSS-IA020A	DSS-IA020T
Detector type	2.0 mm diameter indium arsenide photodiode	
Operating temperature (°C)	22°C ambient	-30°C TE cooled
Operating wavelength (µm)	1.0 – 3.5 μm	1.0 – 3.4 μm
Responsivity (V/W @ peak)	$0.65 \times 10^4 / 10^3$	$2.1 \times 10^4 / 2 \times 10^3$
Noise (V/Hz ^{1/2})	$2 \times 10^{-6} / 10^{-7}$	2 x 10 ⁻⁷ / 2 x 10 ⁻⁸
NEP, pk (W/Hz ^{1/2})	2.0 x 10 ⁻¹⁰	1 x 10 ⁻¹¹
Detectivity (D*)	1.77×10^{10}	1.77 x 10 ¹¹
Bandwidth (-3dB - Hz, typical)	DC – 10 kHz	DC – 10 kHz
Power requirements	± 9 VDC to ± 15 VDC	
Connections	BNC signal output. Shielded power cable terminated with a DB-9 connector directly couples the unit with the PS/TC-1 Low Noise Power Supply / Controller.	


Mechanical Dimensions, Ambient and TE Housing

(All measurements are in inches)

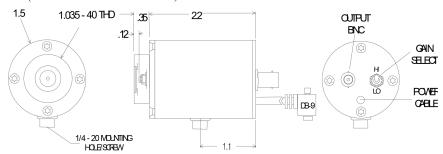


Electrical Diagrams, Ambient and TE Cooled



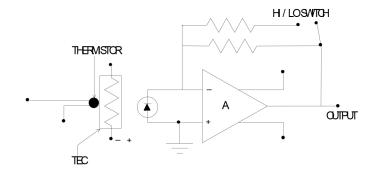

DB-9 Pin Out Diagrams, TE Cooled [Ambient]



- Cooler (+) [No connect]
- **6.** +V
- 2. Cooler (-) [No connect]
- 7. -V
- 3. Thermistor [No connect]
- 8. GND
- Thermistor [No connect] 4.
- 9. Case GND
- No connect



info.sci@horiba.com www.horiba.com/opticalbuildingblocks

USA: +1 732 494 8660 **UK:** +44 (0)20 8204 8142 China: +86 (0)21 6289 6060 France: +33 (0)1 69 74 72 00 **Italy:** +39 2 5760 3050 Brazil: +55 (0)11 5545 1500 Germany: +49 (0)89 4623 17-0 +81 (0)3 6206 4721 Japan: +1 732 494 8660 Other:

